


Group central GC-series

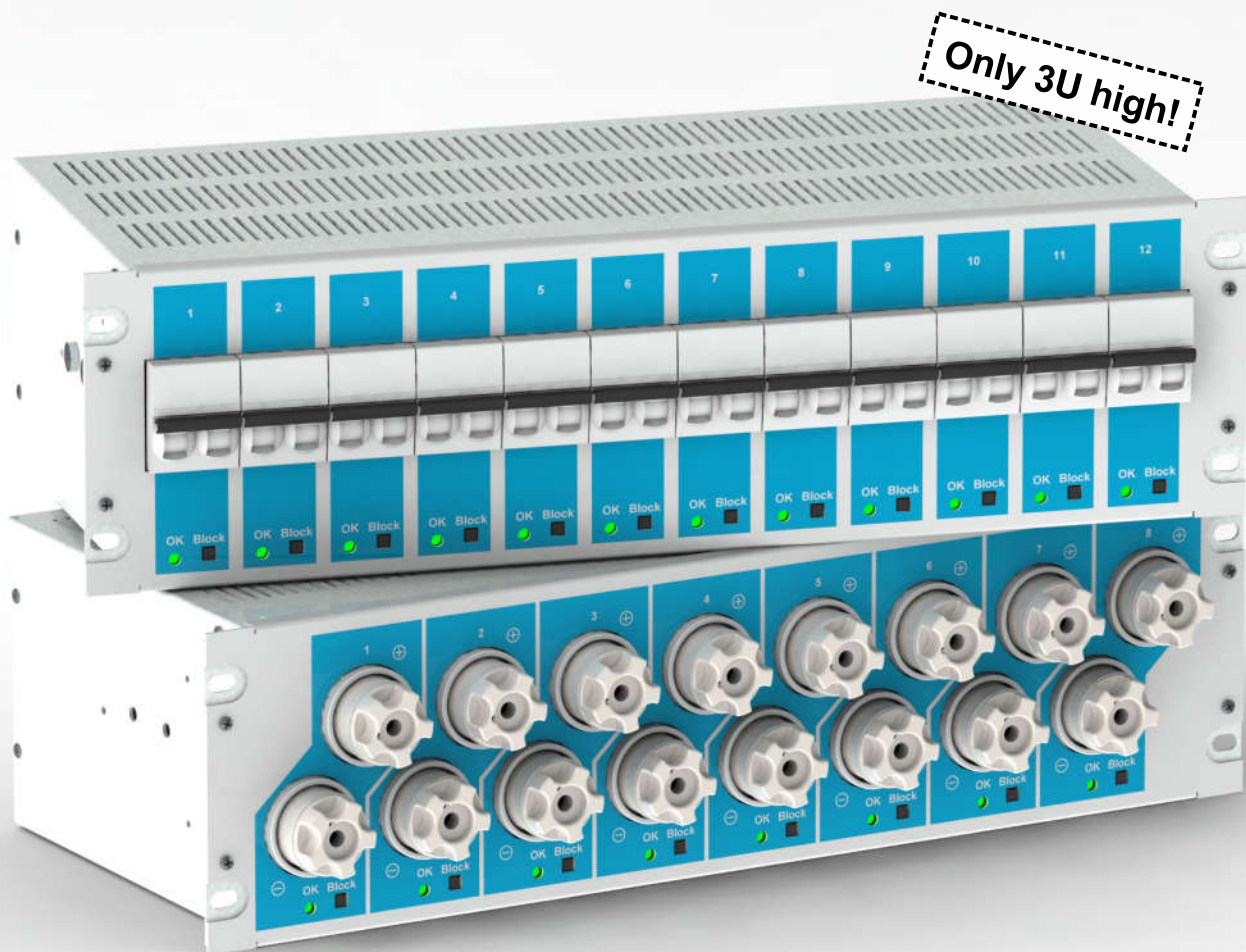

Group central for 19" rack mounting with diazed or MCB.

Each group protected by a 2-pole fuse.

LED indicator for each group.

Change-over potential free sum alarm relay.


Alarm blocking via switch for each group.

Connections through terminals on backside of enclosure or cable harness.

3U high.

Technical data

Voltages	12, 24, 36, 48, 60, 72, 110, 120, 220 VDC.
Number of groups	Diazed: 8 pcs. 2-pole. MCB: 6 pcs. or 12 pcs. 2-pole.
Fuse type MCB	Max 25 A.
Fuse type diazed	DII max 25 A.
Max input current	63 A.
Indications	Green light when voltage present. No light when fuse is tripped.
Input terminals	10 - 25 mm ² .
Output terminals	0,2 - 4 mm ² .
Alarm relay terminals	0,2 - 4 mm ² .
Relay load max	8A/250 VAC, 8A/30 VDC, 1A/60 VDC, 0,2A/220 VDC.
Dimensions HxWxD	3U x 19" x 250 mm (D = part protruding into rack).
Ingress protection	IP20.
Color	RAL 7035 and process blue.
Options	- Cable harness with or without end terminals. - Fuse ratings, characteristics and models according to requirements.

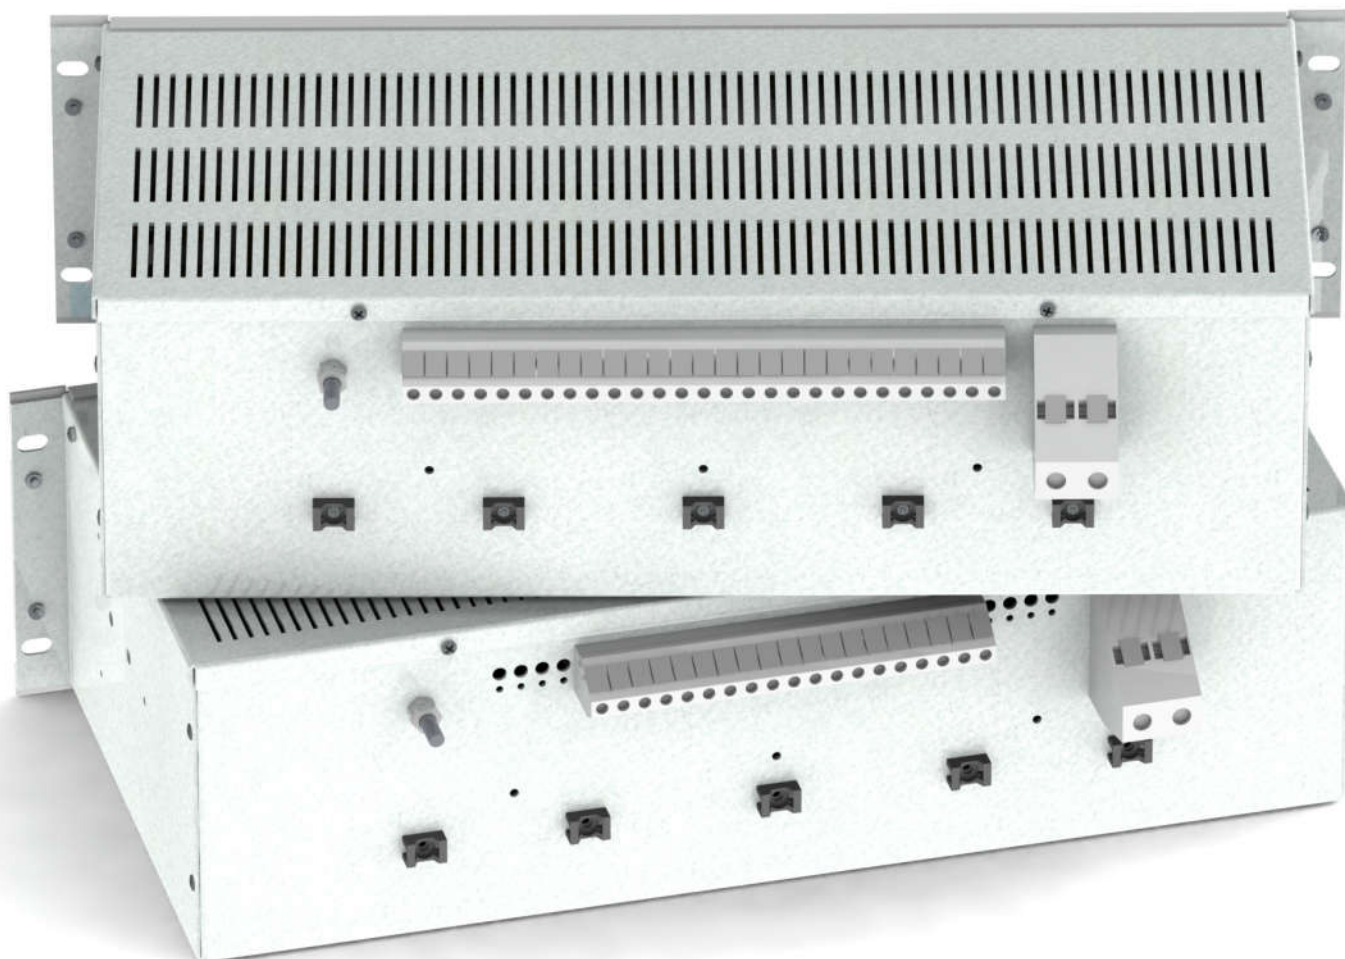

For information, ordering and service:
DC-Design AB, Tel. +46 (8) 522 110 20
info@dc-design.se, www.dc-design.se
Hovslagarevägen 2, 192 54 SOLLENTUNA



Subject to change without notice
Copyright © DC-Design AB
B1957-2